




PumpSmart PS75 Drive Dimensions and Ratings Frame R2-NEMA1/IP21

PUMPSMART

PumpSmart PS75 Pump and Motor Control System

The PumpSmart PS75 is a pump and motor control system that provides integral starting, right-sizing, pump protection and process control for all pumping applications. The PumpSmart PS75 is based upon the ABB ACS 550 variable frequency drive. PumpSmart Control Solutions has worked with ABB to incorporate proprietary pump protection & configuration algorithms into the drive to make it more suitable for pumping applications

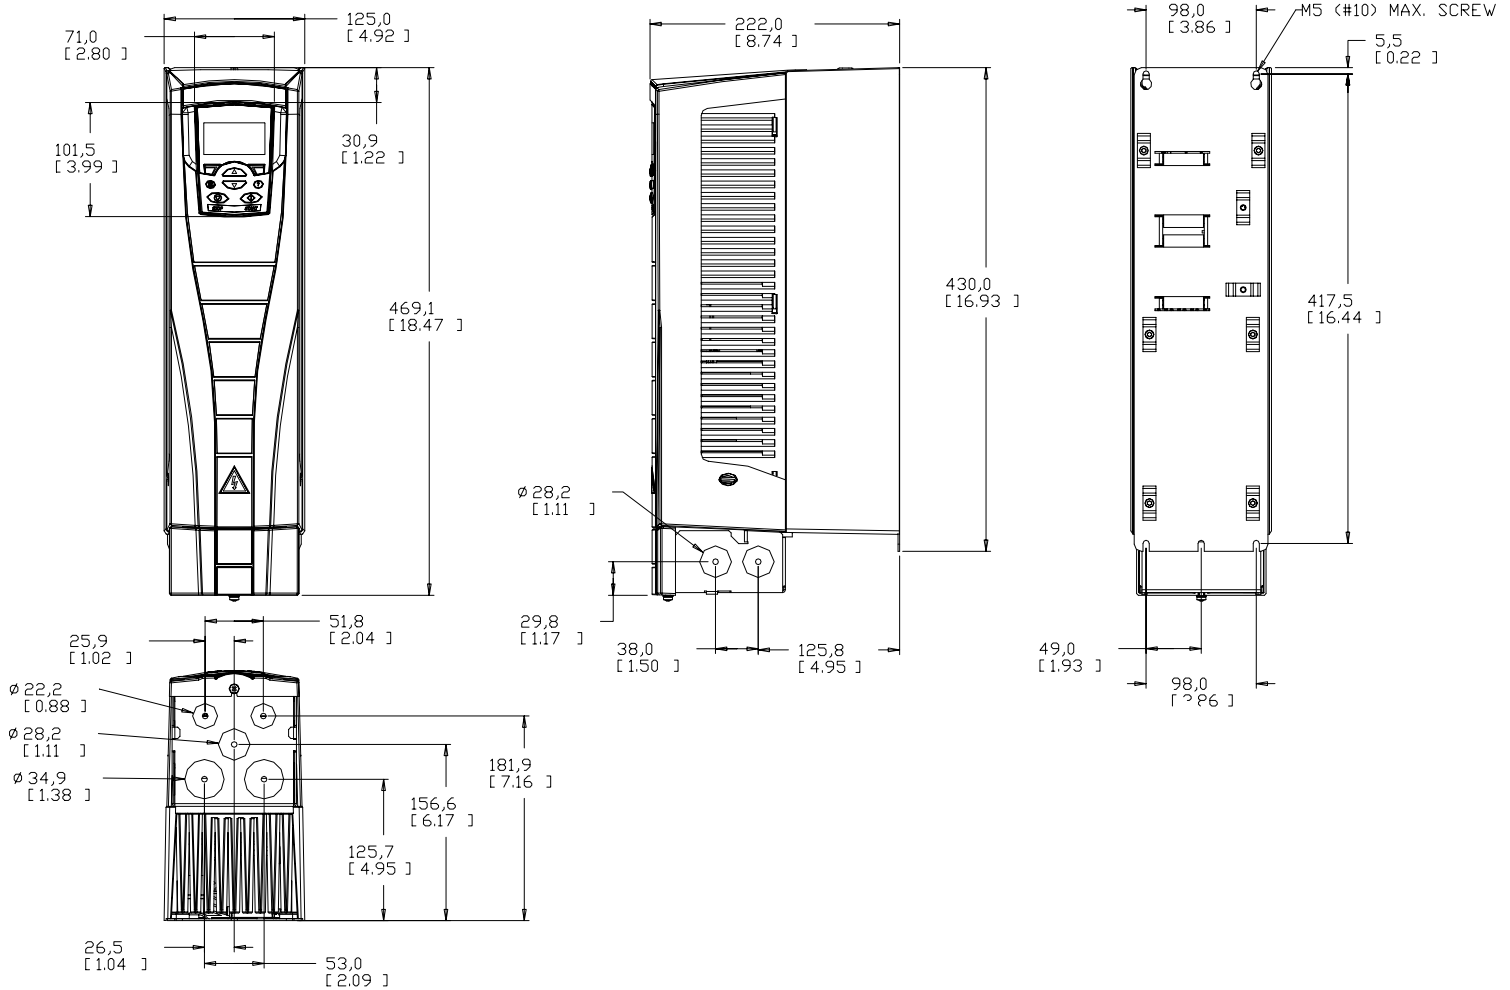

Drive Dimensions

Frame	Height mm [inches]	Width mm [inches]	Depth mm [inches]	Weight kg [lbm]
R2	469 [18.5]	125 [4.9]	222 [8.7]	9 [19.8]

*Dimensions not for construction



PumpSmart PS75 Drive Dimensions and Ratings Frame R2-NEMA1/IP21

PUMPSMART

Drive Ratings

ITT P/N	Input Voltage VAC	Power P ^{N1}		Nominal Current I ^{2N2} Amps	Heat Dissipation		Air Flow		Frame	Enclosure Rating	Recommended Main Fuses		
		KW	HP		Watts	BTU/hr	M ³ /hr	CFM			IEC269gG (A)	UL class T (A)	Bussmann Type
A 08300A06	230	5.5	7.5	24.2	227	776	88	52	R2	NEMA 1/IP21	25	30	JJS-30
A 08300A07	230	7.5	10	30.8	285	973					40	40	JJS-40
A 08302A06	380* /460	7.5*	10	15.4	232	792					16	20	JJS- 20
A 08302A07	380* /460	11*	15	23	337	1150					25	30	JJS- 30
A 08438A01	575	1.5	2	2.7	46	157					10	10	JJS-10
A 08438A02	575	2.2	3	3.9	68	232					10	10	JJS-10
A 08438A03	575	4	5	6.1	124	423					10	10	JJS- 10
A 08438A04	575	5.5	7.5	9	170	581					16	15	JJS- 15
A 08438A05	575	7.5	10	11	232	792					16	15	JJS- 15
A 08438A06	575	11	15	17	337	1150					25	25	JJS- 25


Notes

¹ P^N - Nominal Power Rating at listed voltage rating

² I^{2N} - Continuous base current with 10% overload for 1 min / 10 minutes

* - KW rating applies to drives with 380 VAC input voltage

Power Cabling Schematic

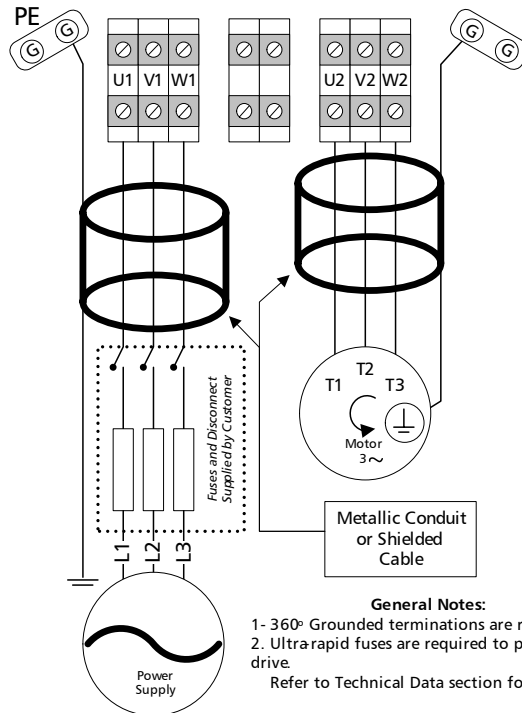

General Notes:

- 1- 360° Grounded terminations are required
 2. Ultra-rapid fuses are required to protect drive.
- Refer to Technical Data section for details

Frame Size	U1/V1/W1 – U2/V2/W2 BRK±, UDC± Terminals						Earthing PE Terminal			
	Min. Wire Size		Max. Wire Size		Torque		Max. Wire Size		Torque	
	mm ²	AWG	mm ²	AWG	Nm	Lb-ft	mm ²	AWG	Nm	Lb-ft
R2 ¹	0.75	18	16	6	1.3	1	16	6	1.3	1

1. Do not use aluminum cable with frame size R1...R4

PS75 Drive Terminal Block Schematic


X1		Terminal Block	
<input checked="" type="checkbox"/>	1	SCR	Signal cable shield connected internally to chassis ground
<input checked="" type="checkbox"/>	2	AI1 (+)	OPTION Analog Input 1, Programmable External Setpoint J1:AI1 off 2..10VDC <input checked="" type="checkbox"/> default J1:AI1 on 4..20mA <input type="checkbox"/>
<input checked="" type="checkbox"/>	3	AGND (-)	Analog Input 1 Ground
<input checked="" type="checkbox"/>	4	+10V	AI Reference Voltage : 10V ± 2%, 10mA max used for AI 1 2-10VDC signals 1K ohm ≤ R ≤10K ohm
<input checked="" type="checkbox"/>	5	AI2 (+)	OPTION Analog Input 2, Programmable Primary Process Transmitter J1:AI2 off 2..10VDC <input checked="" type="checkbox"/> default J1:AI2 on 4..20mA (Process Control Only) <input type="checkbox"/>
<input checked="" type="checkbox"/>	6	AGND (-)	Analog Input 2 Ground
<input checked="" type="checkbox"/>	7	AO1 (+)	OPTION Analog Output 1, programmable 4-20mA Output assigned in parameter 1501. Default is speed
<input checked="" type="checkbox"/>	8	AO2 (+)	OPTION Analog Output 2, programmable 4-20mA Output assigned in parameter 1507. Default is current
<input checked="" type="checkbox"/>	9	AGND (-)	Analog Output Ground
<input checked="" type="checkbox"/>	10	+24VDC	Process Transmitter / DI power source 24VDC / 250mA (reference to GND) Used if PumpSmart is powering the process transmitter and / or digital inputs
<input checked="" type="checkbox"/>	11	GND	
<input checked="" type="checkbox"/>	12	DCOM	
<input checked="" type="checkbox"/>	13	DI 1	OPTION 2 - Wire Start / Stop Change parameter 1002 to 2WDI 1 (1). Default is Keypad Start/Stop
<input checked="" type="checkbox"/>	14	DI 2	Used with 3- Wire Start / Stop
<input checked="" type="checkbox"/>	15	DI 3	Speed Control - Constant speed selection Process Control - Selects PID Se2
<input checked="" type="checkbox"/>	16	DI 4	Speed Control - Constant speed selection Process Control - Programmable Digital Input Not Used
<input checked="" type="checkbox"/>	17	DI 5	Fault Reset Input assigned in parameter 1604
<input checked="" type="checkbox"/>	18	DI 6	Run Enable Input assigned in parameter 1601
<input checked="" type="checkbox"/>	19	RO1C COM	OPTION Assignable Relay (RO1) The output of this relay is assignable by parameter 1401 Default: Ready (19 and 21 connected)
<input checked="" type="checkbox"/>	20	RO1 NC	
<input checked="" type="checkbox"/>	21	RO1 NO	
<input checked="" type="checkbox"/>	22	RO2C COM	OPTION Assignable Relay (RO2) The output of this relay is assignable by parameter 1402 Default: Run (22 and 24 connected)
<input checked="" type="checkbox"/>	23	RO2 NC	
<input checked="" type="checkbox"/>	24	RO2 NO	
<input checked="" type="checkbox"/>	25	RO3C COM	OPTION Assignable Relay (RO3) The output of this relay is assignable by parameter 1403 Default: Fault (25 and 27 connected)
<input checked="" type="checkbox"/>	26	RO3 NC	
<input checked="" type="checkbox"/>	27	RO3 NO	

Analogue I/O

Digital I/O and Auxiliary Power

Relay Outputs

J1
Dip switches
for Analog
Inputs

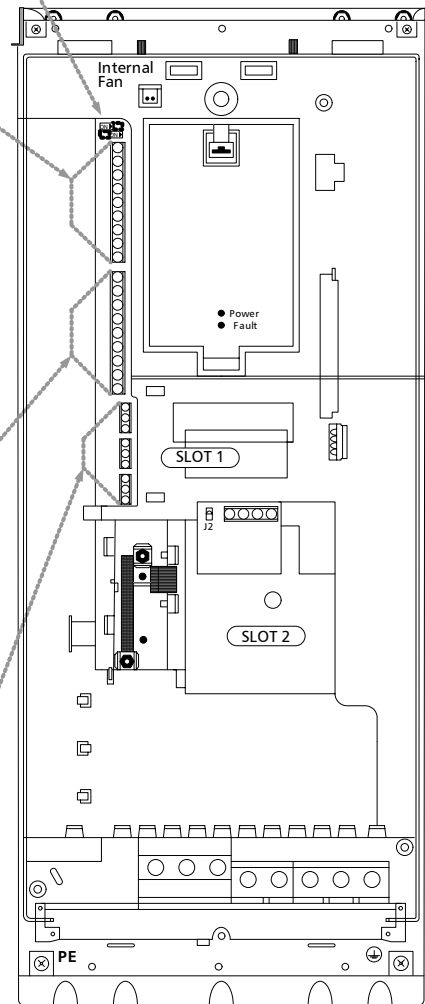

View of I/O Connection board (OMIO)
ACH 550



PumpSmart PS75
Drive Dimensions and Ratings
Frame R2-NEMA1/IP21

PUMPSMART

PumpSmart® PS75

Hardware: ABB ACH550 Drive

CERTIFICATIONS

UL Listed
 Canadian UL Listed

CE Marked

INPUT POWER

Voltage..... 208..240 VAC 1P and 3P +10%/-15%
 380...480 VAC 3 Phase +10%/-15%
 500..600 VAC 3 Phase +10% / -15%

Imbalance..... Max +- 3% of Nominal Phase to Phase
 Input Voltage

Frequency..... 48..63 Hz

Fundamental Power..... 0.98
 Factor (cos Ø1)

MOTOR CONNECTION

Voltage..... 0 to Usupply

Frequency..... 0-500 Hz

Overload Capacity.... Normal Use 1.1 x Rated Current
 for 1 min every 10 min

Switching Frequency.... Default 4kHz, Selectable 1,4,8 and
 12 kHz 1-150 hp (.75-110 kW),
 Selectable 1,4 and 8 kHz 150-550 hp
 (110-355 kW)

Motor Control..... Sensorless Vector Control

Speed Control..... Static Accuracy 20% of motor nominal
 slip

Drive Nominal Output ... 6:1 Maximum

Current..... Motor nominal Current

ENVIRONMENTAL LIMITS

Enclosures NEMA Type 1/IP21
 NEMA TYPE 12/IP54 (U1/01 Only)

Temperature..... 5...104F (-15..40C) No frost Allowed

Humidity..... <95% Relative Humidity,
 Non-condensing

Altitude..... 0..3300 Ft (0..1000M) Standard

Shock..... Not Allowed

Free Fall..... Not Allowed

Vibration..... 5-13.2 Hz 1mm (.04 in)

STANDARD INPUT/OUTPUT

2 Analog Inputs..... (0) 4...20mA, Rin>100 ohm single-ended or
 (0) 2..10VDC, Rin>312k ohm single-ended,
 resolution 0.1%, accuracy +-1%. Default: AI1
 Voltage, AI2 Current Configurable

2 Analog Outputs..... (0) 4...20mA, Load < 500 ohm, Configurable

Auxiliary Voltage..... 24 VDC +- 10%, max. 250 mA

Digital Inputs (6)..... 12V...24VDC with internal or external supply,input
 impedance 1.5 kohm Common Configurations:
 2-Wire Start/Stop, 3-Wire Start/Stop, Hand-off-Auto
 Dual Setpoints, Secondary Protect A, Secondary
 Protect B, Run Enable, E-Stop, Fault Reset, Constant
 Speed Select PID Set Activation

Relay Outputs (3).. Form-C Switchover Contact Max Switching Voltage
 Configurable 250VAC / 30VDC Max Switching Current 6A / 30VDC
 1500VA/250VAC 2A rms max continuous current
 Min Load:500mW (12V,10mA)

Reference Voltage 10 VDC ± 2%
 10mA max current R <10 Kohm

DRIVE PROTECTION

Keypad Loss	Wiring Fault
Earth Fault	Over Current
Over Voltage	Drive Overtemp
Under Voltage	Phase Loss
Motor Temp	Short Circuit
Drive Overload	Communication Failure
Run Enable	

PUMP PROTECTION

Closed Valve	Runout Flow
Loss of Suction/Dry Run	Sensor Failure
Low Flow	Critical Speed (Speed Control)

FIELD BUS

Modbus (built-in std)	ControlNet
DeviceNet	Profibus-DP
EtherNet	

Certified for Construction Purposes only when signed Date.....	Customer Name..... Goulds S/N..... Customer P.O #..... Item No.....
---	--