


**PumpSmart PS200 Pump and Motor Control System**

The PumpSmart PS200 is a pump and motor control system that provides integral starting, right-sizing, pump protection and process control for all pumping applications. The PumpSmart PS200 is based upon the ABB ACS800 variable frequency drive platform. PumpSmart Control Solutions has worked with ABB to incorporate proprietary pump protection, process control and configuration algorithms into the drive to make it more suitable for pumping applications

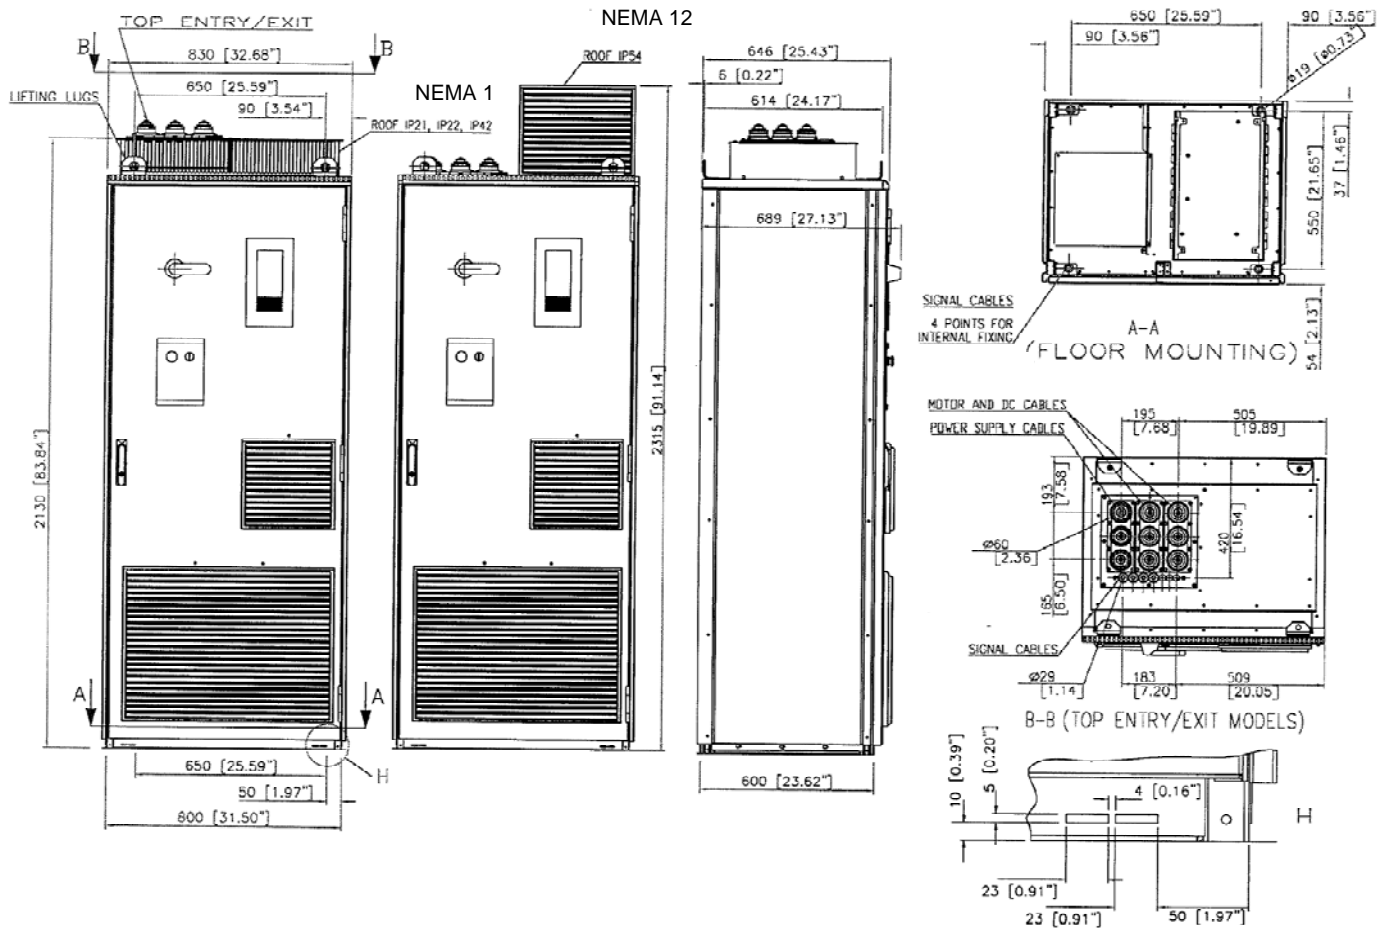

**Drive Dimensions**

Frame	Height mm [inches]		Width mm [inches]	Depth mm [inches]	Weight Kg [lbm]
	NEMA 1	NEMA 12			
R8	2130 [83.84]	2315 [91.14]	830 [32.68]	646 [25.43]	408 [900]

\* Dimensions not for construction




**PumpSmart PS200**  
**Drive Dimensions and Ratings**  
**Frame R8-NEMA1/NEMA12/ASC800-U7**

**PUMPSMART**

**Drive Ratings**

ITT P/N	Input Voltage VAC	Power PN <sup>1</sup>		Nominal Current I <sub>2</sub> N <sup>2</sup> Amps IEC/NEMA	Heat Dissipation		Air Flow		Frame	Enclosure Ratings	Recommended Main Fuses	
		KW	HP		Watts	BTU/Hr	M <sup>3</sup> /Hr	CFM			UL Class (A)	Bussmann Type
A08101A21	460	160	250	NA/316	4500	15350	1220	718	R8	NEMA 12	500 T	JJS-500
A08101A22	460	200	300	N/A/361	5290	18050				NEMA 12	500 T	JJS-500
A08101A23	380*/460	200	350	435/435	6850	23250				NEMA 12	500 T	JJS-500
A08101A24	380*/460	250	400	510/510	7800	26650				NEMA 12	600 T	JJS-600
A08101A25	380*/460	315	500	590/590	8100	27600				NEMA 12	800 L	KTU-800
A08186A15	575	200	300	N/A/290	6170	21050				NEMA 1	500 T	JJS-500
A08186A16	575	250	350	N/A/344	6670	22750				NEMA 1	500 T	JJS-500
A08186A17	575	250	400	N/A/387	7415	25300				NEMA 1	500 T	JJS-500
A08186A18	575	315	450	N/A/426	8470	28900				NEMA 1	600 T	JJS-600
A08187A15	575	200	300	N/A/290	6170	21050				NEMA 12	500 T	JJS-500
A08187A16	575	250	350	N/A/344	6670	22750				NEMA 12	500 T	JJS-500
A08187A17	575	250	400	N/A/387	7415	25300				NEMA 12	500 T	JJS-500
A08187A18	575	315	450	N/A/426	8470	28900				NEMA 12	600 T	JJS-600

1 PN - Nominal Power Rating at listed voltage rating for variable torque loads  
 2 I<sub>2</sub>N - Continuous base current with 10% overload for 1 min / 5 minutes  
 \* KW rating applies to drives with 380VAC input voltage

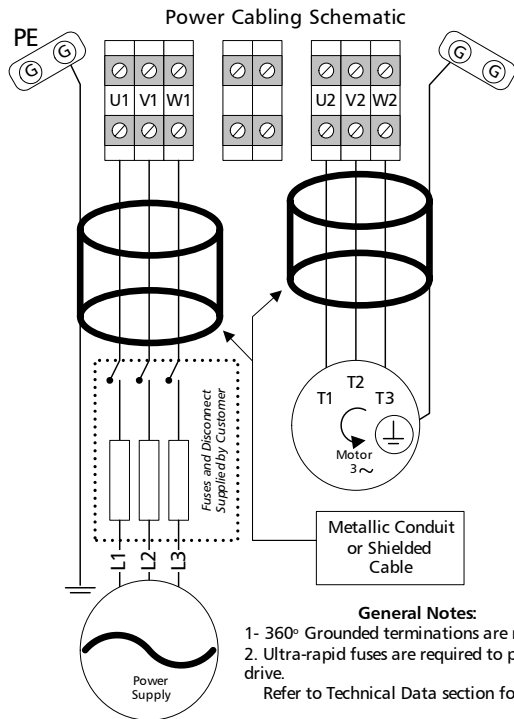

Frame Size	U1/V1/W1 – U2/V2/W2 BRK ±, UDC ± Terminals				Earthing PE Terminal			
	Min. Wire Size		Screw	Torque		Screw	Torque	
	mm <sup>2</sup>	AWG		Nm	Lb-ft		Nm	Lb-ft
R8	3x240	3x700 MCM	M12 ( ½ )	50..75	37..55	M10 ( 3/8 )	30..44	22..32



**PumpSmart PS200**  
**Drive Dimensions and Ratings**  
**Frame R8-NEMA1/NEMA12/ACS800-U7**

**PUMPSMART**

**PumpSmart® PS200**

*Drive Hardware: ABB ACS800 -6 Pulse PWM*

**CERTIFICATIONS**

600 VAC and Below  
 UL Listed  
 Canadian UL Listed

CSA Certified  
 CE Marked

**INPUT POWER**

Voltage..... 208..690 VAC 3 Phase ±10%  
 Overload..... 110% for 1 min/5 min,  
 140-150% for 10 sec at startup  
 Frequency..... 48..63Hz

Fundamental Power.....  $\text{COS}\Phi_1 = 0.98$  (fundamental)  
 Factor ( $\text{COS}\Phi_1$ )  $\text{COS}\Phi_1 = 0.93..95$  (total)  
 Efficiency..... 98% (at nominal power)

**MOTOR CONNECTION**

Voltage.....  $0..V_{1in}/V_{3in}$   
 Frequency..... 0..300 Hz  
 0..120 Hz with dV/dT Filters  
 Motor Control..... ABB Direct Torque Control Software  
 Static Accuracy: 10% of Motor Slip  
 Speed Control..... Dynamic Accuracy: 0.3-0.4% second  
 with 100% Torque Step

**ENVIRONMENTAL LIMITS**

Enclosures..... NEMA 1/IP21  
 NEMA 12/IP54  
 Temperature..... 5..104° F(-15 to 40°C) Standard  
 104..122° F (40-50 C) with  
 de-rating (1%/1 C)  
 Humidity..... 5..95% Relative Humidity  
 Altitude..... 0..3300 Ft (0..1000M) Standard  
 3300..13,123Ft (1000..4000M) with  
 de-rating (1%/100M)  
 Vibration..... Max. 1 mm (0.04 in.) 5-13.2 HZ  
 Max. 7 m/s<sup>2</sup> (23 ft/s<sup>2</sup>) 13.2 – 100  
 HZ, Sinusoidal  
 Shock, Free Fall ..... Not Allowed

**STANDARD INPUT/OUTPUT**

2 Current Analog Inputs..... 4...20mA  
 100Ω Input Resistance  
 11 bit resolution  
 1 Voltage Analog Input..... 2-10 VDC  
 200Ω Input Resistance  
 11 bit resolution  
 Galvanically isolated as a group

2 Current Analog Output.....  
 4...20mA  
 700Ω Max load impedance  
 10 bit resolution  
 Galvanically isolated as a group

Digital Inputs (7).....  
 2 Wire Start/Stop  
 Hand-off Auto (HOA)  
 3-Wire Start/Stop  
 Setpoint 1-2  
 Speed Override  
 Specific Gravity  
 Secondary Protect A/B  
 Digital Reset  
 E Stop/Permissive  
 Motor Thermistor  
 24 VDC Input Voltage  
 1 mS filtering time

Relay Outputs (3)  
 Configurable.....  
 Form-C Switchover Contact  
 24 VDC or 250 VAC  
 2A max continuous current

Reference Voltage.....  
 Output  
 10 VDC ± 0.5%  
 10mA max current  
 Auxiliary Voltage Output...  
 24 VDC ±10%  
 250 mA max current output

**DRIVE PROTECTION**

Keypad Failure  
 Earth Fault  
 Over Voltage  
 Over Temperature (VFD)  
 Phase Loss

Over Current  
 Under Voltage  
 Over Temperature (Motor)  
 Over Torque  
 Motor Stall

**PUMP PROTECTION**

Loss of Suction/Dry Run  
 Low Flow  
 Run-out Flow  
 Shut-off/Dead Head  
 Critical Speed Lockout

General Condition  
 Sleep Function  
 Sensor Failure  
 Safe Speed Operation

**FEATURES:**

Smartflow  
 Smartcontrol (PID Torque)  
 Cavitation Control  
 Automatic Fault Reset

Multipump (Synchronous Control)  
 Multipump (Backup)  
 System Curve Compensation  
 Pump Cleaning Sequence

**FIELDBUS**

Communication  
 Modules.....

Modbus, Profibus DP  
 Ethernet, DeviceNet  
 ControlNet

Certified for Construction Purposes only when signed    Date.....	Customer Name.....  Goulds S/N.....  Customer P.O #.....  Item No.....
---	--