


PumpSmart PS10 Load Monitor

General

Dimensions (WxHxD) 45mm x 90mm x 115mm (1.77" x 3.54" x 4.53")
 Weight 0.3 kg (10.5 Oz)
 Enclosure IP20 - NEMA 1
 Mounting 35 mm DIN-rail 46277
 Power Consumption 3W / 10A Maximum
 (Fuse Sizing)
 Voltage(s) Single Phase: 100-240 VAC +/- 10%
 Three Phase: 100-600 VAC +/- 10%
 Three Phase: 600-690 VAC +/- 10%
 Frequency 50Hz or 60 Hz
 Relay Output 5A / 240 VAC Resistive
 1.5A / 240 VAC Pilot Duty/AC12
 Current Input 50A Max w/ Current Transformer CTM010,
 CTM025, or CTM 050
 Digital Input 48VDC or 240 VAC Maximum
 (External Reset) High: >24VAC/VDC
 Low: <1 VAC/VDC
 Approvals UL / cUL (up to 600VAC)

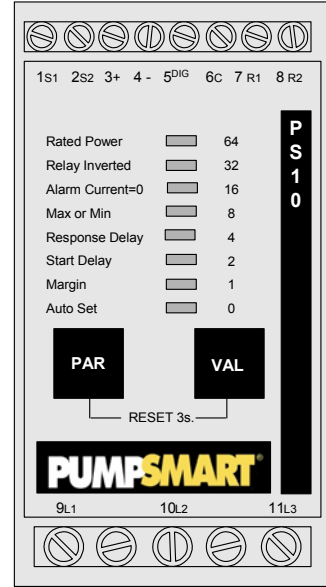

Option	Voltage Rating	Motor Full-Load Current	Monitor P/N	Primary CT P/N
01	1P 100-240 VAC 3P 100-600 VAC	0.4 - 10	A08176A	A08180A01
02		10.1 - 25		A08180A02
03		26 - 50		A08180A03

NOTE(S)

CERTIFIED FOR CONSTRUCTION PURPOSES ONLY WHEN SIGNED

DATE

Customer:.....
 Goulds s/n:.....
 Customer P.O.:.....
 Item No.:.....
 Service:.....

Issue	Drawing is not to scale Dimensions in inches [mm]	Drawn: NWG 122303	Drawing A08177A	Revision 0	Issue -
		Checked: DK 010904			